

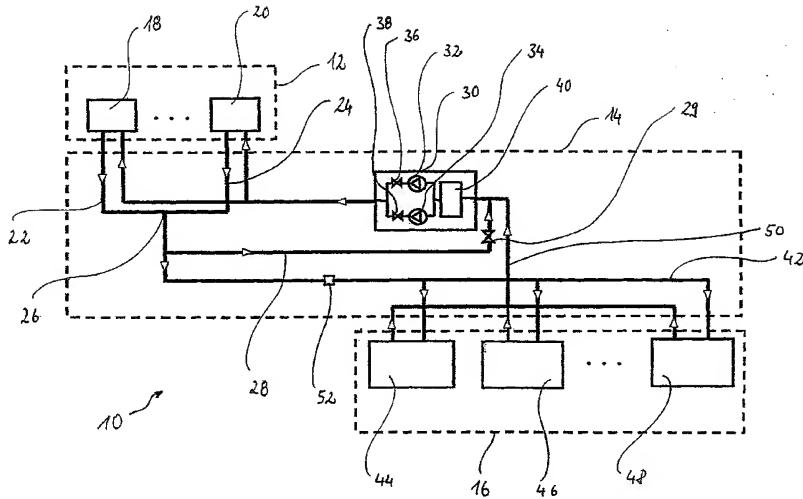
(43) International Publication Date
14 July 2005 (14.07.2005)

PCT

(10) International Publication Number
WO 2005/063567 A1(51) International Patent Classification⁷: B64D 11/04,
13/06, F25D 17/02Kayihan [TR/DE]; Julius-Vosseler-Strasse 107, 22527
Hamburg (DE).(21) International Application Number:
PCT/EP2004/014850(74) Agent: BEYER, Andreas; Wuesthoff & Wuesthoff,
Schweigerstrasse 2, 81541 München (DE).(22) International Filing Date:
30 December 2004 (30.12.2004)(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
103 61 686.1 30 December 2003 (30.12.2003) DE(71) Applicant (for all designated States except US): AIRBUS
DEUTSCHLAND GMBH [DE/DE]; Kreetslag 10, 21129
Hamburg (DE).(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).*[Continued on next page]*(54) Title: COOLING SYSTEM FOR COOLING HEAT-GENERATING INSTALLATIONS AND FOR MAINTAINING THE
TEMPERATURE OF CLOSED-OFF AREAS AT BELOW CABIN TEMPERATURE IN AN AIRCRAFT

(57) Abstract: In a cooling system (10) for cooling heat-generating installations (44, 46, 48) in an aircraft, with a refrigerating installation (12), at least one refrigeration consumer (44, 46, 48) and a refrigeration transport system (14) connecting the refrigerating installation (12) and the refrigeration consumer (44, 46, 48), it is provided that the refrigerating installation (12) comprises at least one refrigeration machine (18, 20) which covers the maximum refrigeration requirement of the at least one refrigeration consumer (44, 46, 48) and in that the at least one refrigeration consumer (44, 46, 48) is supplied with cold generated in the refrigerating installation (12) via a refrigerating agent circulating in the refrigeration transport system (14).

WO 2005/063567 A1



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.